



**PRIMO 11 / 14**

FLUSH MOUNT CEILING

location:  
**DAMP**

**SPECIFICATIONS:**

**DESCRIPTION**

Flush-mounted ceiling fixture, featuring Opal Matte glass diffuser.

**LAMPING**

**LED:** 16W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 1600 lumens, 30,000 hours, included. (Primo 11 only)

**LED:** 20W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 2200 lumens, 30,000 hours, included. (Primo 14 only)

**DIFFUSER**

Handcrafted glass diffuser in Opal Matte.

Primo 11: 11.5" Dia. x 3.25" H

Primo 14: 14" Dia. x 3.75" H

**CONSTRUCTION**

Glass diffuser is secured to fitter with three set screws. Stamped aluminum fitter is powder coated white.

**MOUNTING**

Installs directly to a 4" octagonal outlet box, centered on fixture.

90°C supply wire required for incandescent lamping.

**LABELS**

UL or ETL Listed. Suitable for Damp Locations (interior use only).



OPAL MATTE

**Project Information:**


All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 3/18**




**ORDERING:**

Primo 11: \_\_\_\_\_



FIXTURE OPTIONS	LAMP OPTIONS
PRIMO11C 11.5" Opal Matte	LED 16W LED 1600 lumens

Primo 14: \_\_\_\_\_

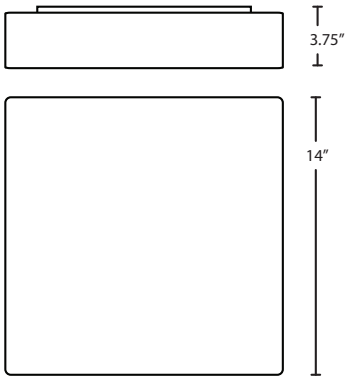

FIXTURE OPTIONS	LAMP OPTIONS
PRIMO14C 14" Opal Matte	LED 20W LED 2200 lumens

**Ex. PRIMO11C-LED**  
Primo 11 Ceiling, Opal Matte Shade

**Project Information:**