



KONA

MINI SCONCES WALL



SPECIFICATIONS:

DESCRIPTION

Wall-mounted sconce featuring one handcrafted glass.

LAMPING

Standard: 40W Low-pressure G9 Halogen 120V lamp, included.
Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

LED: 5W LED Replaceable source 120V, dimmable, included.

DIFFUSER

Shade shall be handcrafted glass of various decors.
Diameter of 5.5" and height of 2.5"

CONSTRUCTION

Fixture utilizes metal arm assembly with stamped steel canopy and faceplate (5" Circle or Square), with plated finish.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING


Installs directly to a 4" octagonal outlet box. Wall-mount only.
Designed for uplighting, but may also be oriented downward.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



KONA SHOWN IN DICRO SWIRL (550493) & SUNSET (117681) WITH SQUARE CANOPY

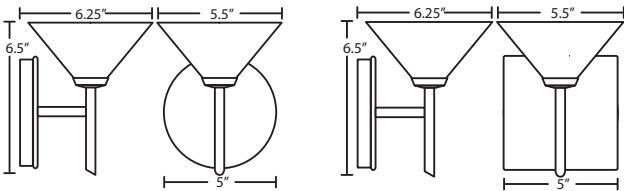

117607
WHITE

117687
BLUE MATTE


117652
MARBLE

117691
BI-COLOR

282453
WHITE STARPOINT

282890
MANGO STARPOINT

282484
BLUE STARPOINT



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/15



KONA

MINI SCONCES WALL

ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
1SW Sconce	117607 White	(blank) 40W G9 Hal	BR Bronze	SQ Square
	117652 Marble	LED 5W LED 120V, dimmable	CR Chrome	Canopy
	117681 Sunset		SN Satin Nickel	
	117687 Blue Matte			
	117691 Bi-color			
	282453 White Starpoint			
	282484 Blue Starpoint			
	282490 Mango Starpoint			
	550493 Dicro Swirl			

Ex. 1SW-550493-SN

Kona Mini Sconce w/ Dicro Swirl Glass,
Satin Nickel Finish

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Project Information: