



PERI

VANITIES WALL

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 40W Low-pressure G9 Halogen 120V lamp, included.

Suitable for use in an open fixture. Dimmable with standard incandescent dimmer.

LED: 5W LED Replaceable source 120V, dimmable, included.

DIFFUSER

Shade shall be handcrafted glass of various decors.

5.375" Dia. x 3.125" H, spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish.

Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required.

Orient upward or downward, wall-mount only.

Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



PERI SHOWN IN OPAL MATTE (541007) IN DOWNWARD ORIENTATION

5410VM
VANILLA MATTE



541080
AMBER MATTE



541035
CHARTREUSE



541087
BLUE MATTE



For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 7/15




PERI




VANITIES WALL

ORDERING:

FIXTURE	GLASS OPTIONS	METAL FINISH	METAL FINISH	OPTIONS
2SW 2 Light Vanity	541007 Opal Matte	(blank) 40W G9 Hal	BR Bronze	SQ Square Canopy
3SW 3 Light Vanity	541035 Chartreuse	LED 5W LED 120V, dimmable	CR Chrome	
4SW 4 Light Vanity	541080 Amber Matte		SN Satin Nickel	
	541087 Blue Matte			
	5410VM Vanilla Matte			



Ex. 3SW-5410VM-SN
 Peri 3-Light Vanity w/ Vanilla Matte Glass,
 Satin Nickel Finish

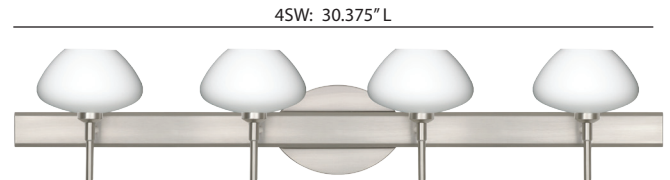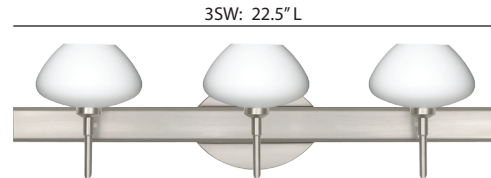

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

Project Information:

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.