



MIRANDA 26

SCONCES WALL



location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconces featuring closed-ended handcrafted glass.

LAMPING

Standard: 3x 40W G9 Halogen 120V, suitable for dimming.

LED: 5W LED Replaceable source 120V, dimmable, included.

Optional fluorescent configuration available (see ordering).

DIFFUSER

Diffuser shall be handcrafted Satin White glass.

CONSTRUCTION

Steel fitter with white powder coat finishes. Glass is secured by steel set screws.

MOUNTING


Installs directly to a 4" octagonal outlet box, centered on fixture.

75°C supply wire required for incandescent lamping.

Orient horizontal or vertical, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

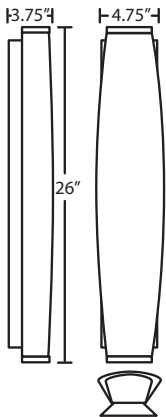

MIRANDA 26 SHOWN IN SATIN WHITE (MIRANDA26-SW)

ORDERING:

FIXTURE	DECOR	LAMP OPTIONS	METAL FINISH
MIRANDA26 Sconce	SW Satin White	(blank) 3x 40W G9 Halogen 124T5 24W T5 120/277V LED 3x 5W LED 120V, dimmable	CR Chrome SN Satin Nickel

Ex. MIRANDA26-SW-CR
Miranda 26 Wall Sconce w/ Satin White Glass, Chrome Finish

Project Information:

LED SCONCES:

- Total power of only 5 watts
- Dimmable with a standard dimmer
- Rated life: 25,000 hours
- 450 lumens
- CCT: 3000° Kelvin
- CRI: 80+

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14